3110

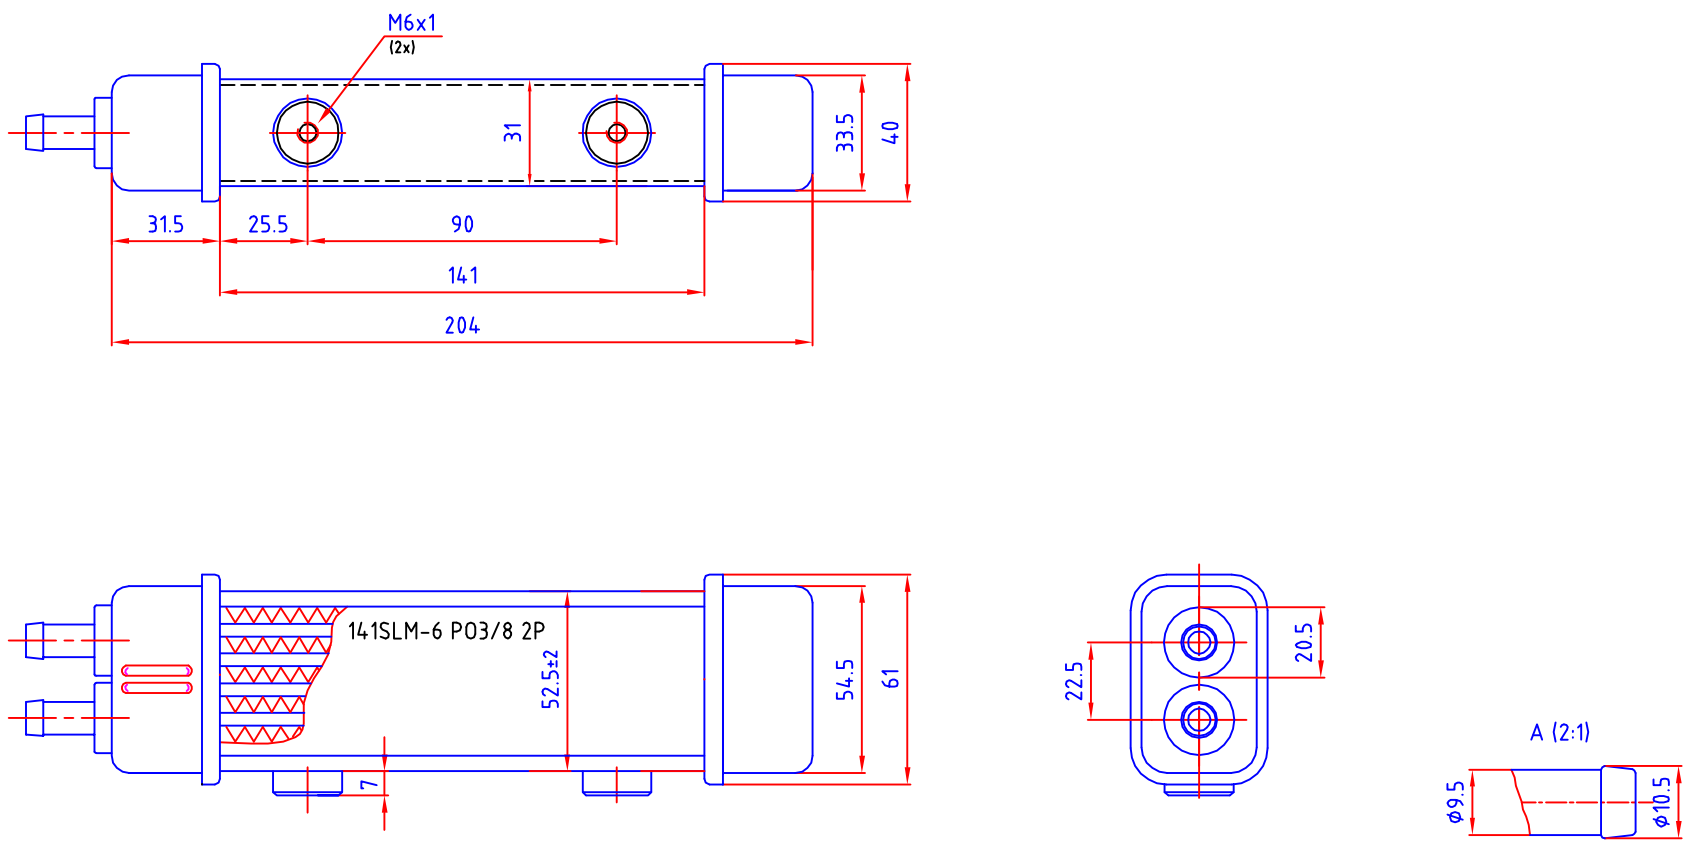

WEIGHT	
VOLUME	
WORKING PRESSURE	5 bar
MAX PRESSURE	10 bar
TEST PRESSURE	4 bar
BURST PRESSURE	
TEST ACC TO	
PAINT	Powdercoated
PAINT THICKNESS	
CONNECTION MAX TIGHTENING TORQUE	
COUNTERACTING SPANNER MUST BE USED WHEN TIGHTENING CONNECTIONS	

TOLERANCE CLASS: ISO 2768-v	0.5 up to 3	over 3 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 400	over 400 up to 1000
PERMISSIBLE DEVIATIONS FOR LINEAR DIMENSIONS EXCEPT FOR BROKEN EDGES. (mm)	—	±0.5	±1	±1.5	±2.5	±4

FINS/TURB	C/4
DRAWN	DATE/SIGN
082207	MB
APPROVAL	DATE/SIGN
ENGINEER	
QUALITY	
PROD	
LOGISTICS	
CUSTOMER	JAGG

POS NO	QTY	DENOMINATION	MATERIAL	DIMENSION	REMARKS
			Al		

ALL MEASUREMENTS REFER TO UNPAINTED OBJECT

DENOMINATION 141SLM-6 PO3/8 2P

OILCOOLER

Setrab OilCooler

27B Greenscapes Ct, Johnstown, OH 43031 h(740)967-1726

TOLERANCES WHERE NOT SPECIFIED: ISO2768-v

REPLACES

REPLACED BY

CONNECTED DRAWINGS

SCALE

E

DRAWING NO: 3110

ISSUE