



### LUGGAGE RACK RISERS, GLOSS BLACK

7158

#### Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### **WARNING**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

#### **NOTICE**

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 4 Luggage Rack Spacer
  - 1 Hardware Kit including:
    - 2 #10-24 x 2" BSCS
    - 2 #10-24 x 1-3/4" BSCS
    - 4 Spacer, .2 x .75 x .125
    - 4 Spacer, .2 x 1.00 x .125
    - 4 1/4" SAE Flat washer

You will also need:

Phillips screwdriver, set of hex wrenches, 1/4" drill bit and drill

#### **NOTICE**

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**.



#### **NOTICE**

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 2 If equipped, put the motorcycle on the center-stand.
- STEP 3 Disconnect the battery.
- STEP 4 Open the top trunk lid; remove the 15 screws securing the plastic underside of the lid. Save the hardware for later use. See Pic. 1.
- STEP 5 Remove the two screws on each latch ring. See Pic. 1.
- STEP 6 Pull the trunk lid underside down; disconnect the multi-pin connector. See Pic. 2.
- STEP 7 Set aside the trunk lid underside.
- STEP 8 Remove the existing luggage rack and hardware; save for later use.


**NOTE:** It is recommended that the existing rack mount holes in the trunk lid be enlarged with a 1/4" drill bit to allow for alignment and ease of installation.  
 For installation where a trunk spoiler is already installed, ensure that there is enough clearance to install rack risers before drilling any holes.

- STEP 9 Insert a 1 3/4" screw, washer and small rubber spacer through the underside of the trunk lid in one of the front holes. See Fig 1.
- STEP 10 Install a large rubber spacer and rack riser over the protruding end of the screw on the topside of the trunk lid. See Pic. 3 and 4 and Fig. 1.
- STEP 11 Repeat Steps 9 and 10 for the other front hole.
- STEP 12 Carefully hold the rack in position and begin the threads of the screws into the rack; do not fully tighten the screws. Allow the rack to "hang" while the rear screws are prepared. See Pic. 5.
- STEP 13 Install a 2" screw with washer and small rubber spacer through one of the rear holes in the trunk lid.
- STEP 14 Place large rubber spacer and rack riser over the protruding end of the screw; repeat for the other side.
- STEP 15 Thread the rear screws into the rack. Do not fully tighten screws.
- STEP 16 Close trunk lid; center rack on lid
- STEP 17 Carefully open the lid; tighten screws.
- STEP 18 Reconnect multi-pin connector; reinstall trunk lid underside.
- STEP 19 Reinstall 15 screws securing trunk lid underside to lid.
- STEP 20 Reinstall latch rings and screws.
- STEP 21 Check for proper lid operation.

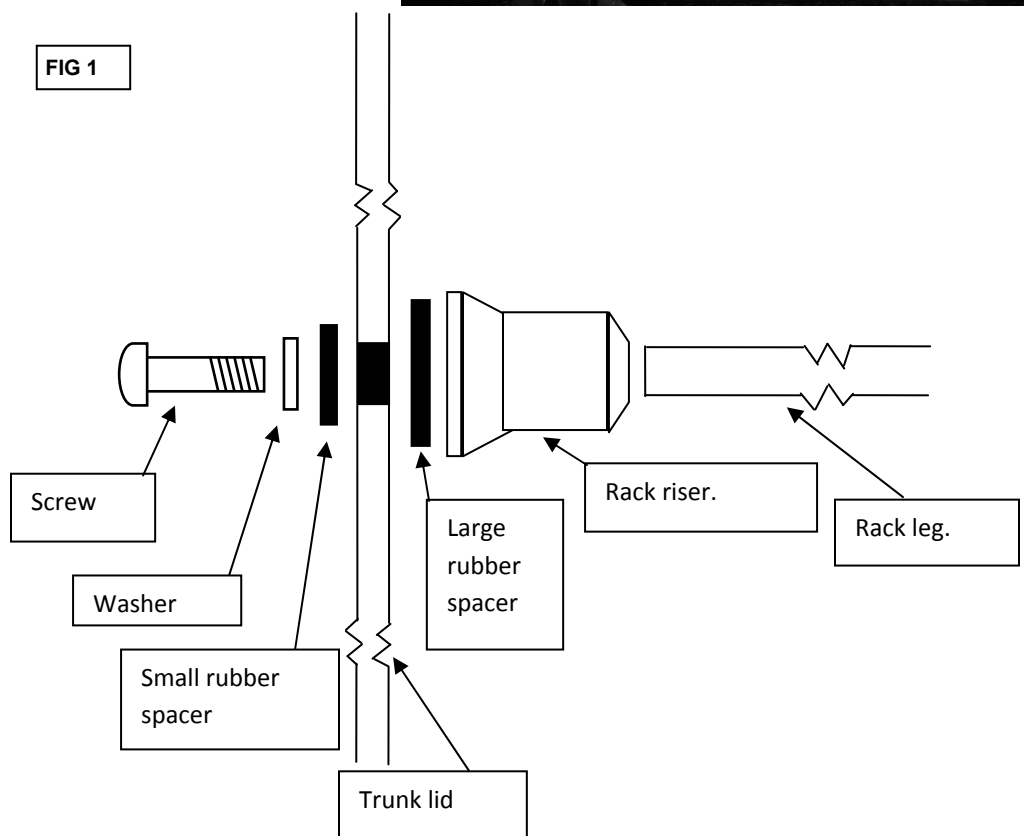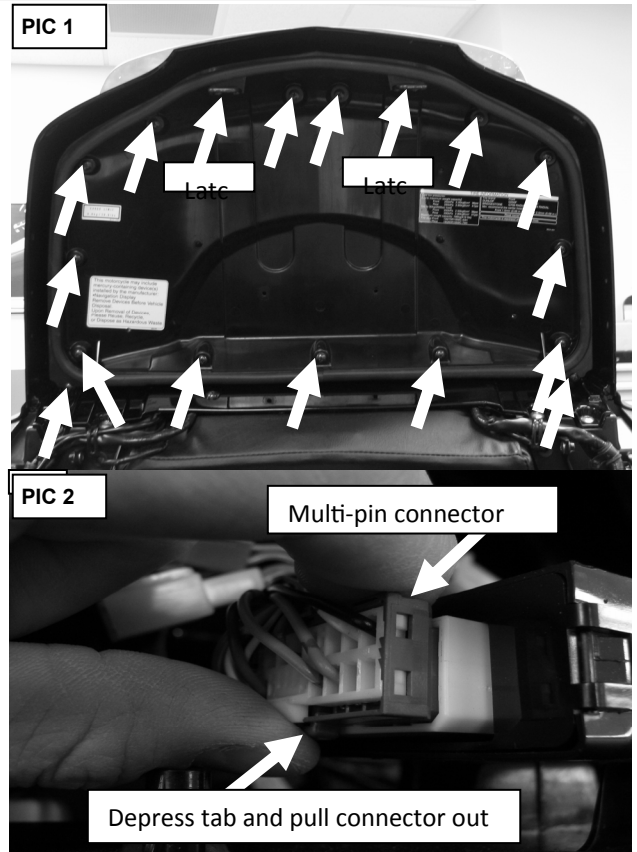





PIC 3

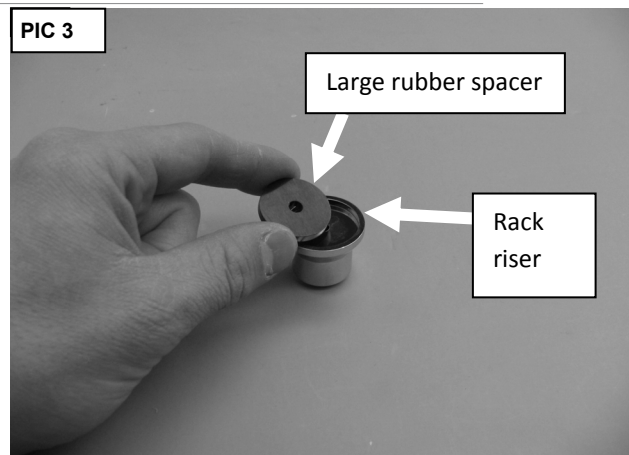

PIC 4

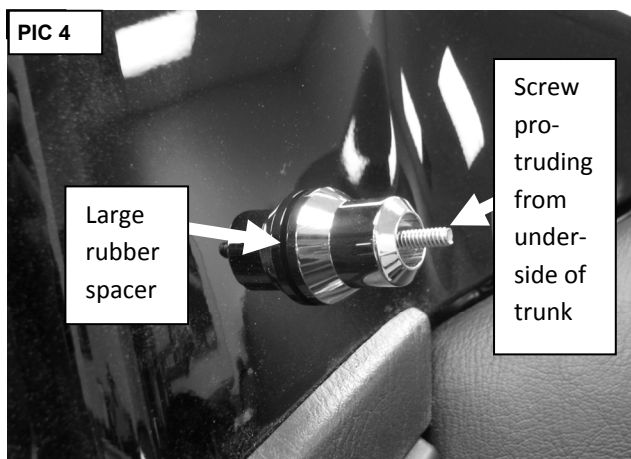

PIC 5

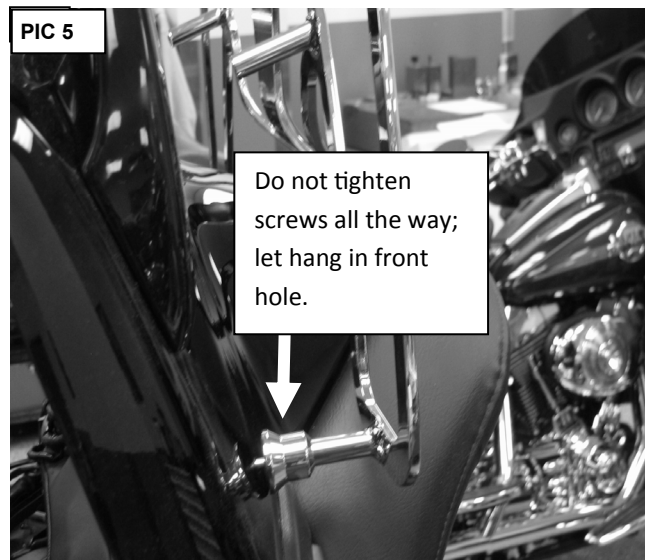

### NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.