

## INSTALLATION INSTRUCTIONS

### COMFORT BRAKE PEDAL FOR INDIAN®

**5814 CHROME, 5815 GLOSS BLACK**

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- |   |             |   |                                 |
|---|-------------|---|---------------------------------|
| 1 | Brake Pedal | 1 | Hardware Kit, containing:       |
| 1 | Brake Peg   | 1 | Cotter Pin                      |
|   |             | 1 | M8 x 25mm Socket Head Cap Screw |
|   |             | 1 | Internal-tooth Lock Washer      |

### YOU WILL ALSO NEED:

Metric hex bit set, metric socket set or combination wrench set, needle nose pliers, snap ring pliers, ft-lbs (Nm) torque wrench, blue loctite

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.


**NOTICE** AVOID DAMAGE TO THE MOTORCYCLE. PROTECT PAINTED SURFACES WITH A SOFT CLOTH OR BLANKET.

**STEP 2** Unfasten the floorboard support and rear master cylinder assembly from the bike frame. Carefully remove the whole assembly away from the bike. Set mounting hardware off to the side, it will be reused.

**STEP 3** Remove existing cotter pin that is fastening the rear master cylinder piston to the existing brake pedal. Set off to the side, it will not be reused.

**STEP 4** Refer to PIC 3. Remove the rear master cylinder piston from the existing brake pedal.

**STEP 5** Unfasten the rear master cylinder assembly from the floorboard support. Set hardware off to the side, it will be reused.

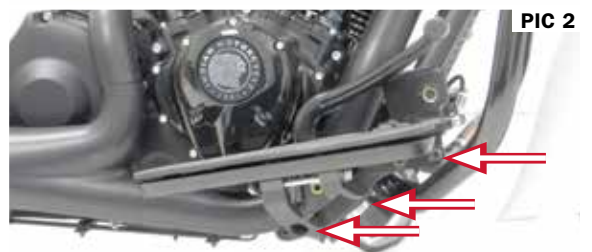

## INSTALLATION INSTRUCTIONS

### COMFORT BRAKE PEDAL FOR INDIAN®

-CONTINUED-

**STEP 6** Remove the OEM hex head bolt from the brake pedal. This will free the top hook of the spring from the brake pedal. Set hardware aside, it will be reused.

**STEP 7** Refer to PIC 4. Remove existing brake pedal from the floorboard assembly's pivot shaft. Pay attention to the order of hardware that is removed: snap ring, flat washer, and brake pedal. Leave the wave washer on the shaft. Set hardware aside, it will be reused.

**STEP 8** Locate provided Brake Pedal.

**STEP 9** Refer to PIC 5 and 6. Locate the hardware that was removed in Step 7. Be sure the OEM wave washer is on the pivot shaft on the floorboard support. Place the Brake Pedal followed by the flat washer onto the shaft. Secure parts in place with the snap ring.

**STEP 10** Refer to PIC 5 and 6. Locate the OEM hex head bolt that was removed in Step 6. Apply a small amount of blue loctite to hex bolt. Align the top hook of the spring with the new brake pedal and secure it in place with the OEM bolt.

**STEP 11** Locate hardware that was removed in Step 5. Apply a small amount of blue loctite to each bolt. Align and fasten the rear master cylinder assembly to the floorboard support. Fully tighten hardware.

**STEP 12** Locate provided Cotter Pin. Align and place the rear master cylinder's piston onto the boss on the back side of the new brake pedal. Secure piston in place using the Cotter Pin.

**STEP 13** Refer to PIC 7. Locate the floorboard support mounting hardware that was removed in Step 2. Apply a small amount of blue loctite to each bolt. Align and fasten the floorboard support to the motorcycle. Fully tighten hardware.

**TORQUE VALUE FOR FLOORBOARD SUPPORT BOLTS:**  
35 FT-LBS (47.5 NM)

**STEP 14** Locate provided Brake Peg, Internal Tooth Lock Washer, and Socket Head Cap Screw.


**STEP 15** Refer to PIC 8. From the inside edge of the brake pedal, thread the screw all the way through the peg mounting hole. Place the washer onto the screw.

**STEP 16** Refer to PIC 9 and 10. Thread the Peg onto the Screw; adjust the angle of the Peg. Hold the Peg and tighten the Screw. Fully tighten hardware.

**STEP 17** Test for proper brake function and inspect for any possible interference. Familiarize yourself with this new location before operating the bike on public roadways.

#### WARNING

ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE BEFORE RIDING.

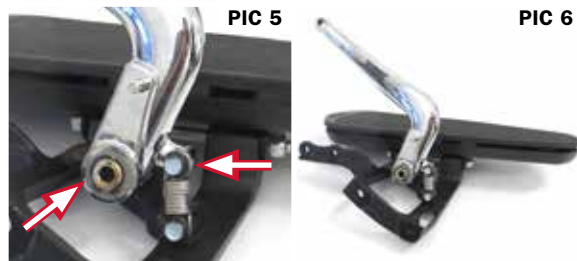

## INSTALLATION INSTRUCTIONS

### COMFORT BRAKE PEDAL FOR INDIAN®

-CONTINUED-

#### NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)