



# INSTALLATION INSTRUCTIONS

Part # 750-2400

## IMPORTANT INFORMATION

This Jagg oil cooler must be installed following these instructions. Read the easy-to-follow instructions fully prior to starting the installation of the oil cooler kit. Correct installation is the only way to ensure proper operation of the oil cooler kit.

QTY.	KIT CONTENTS
1	Jagg LowMount 10-row oil cooler assy.
2	90° AN06-3/8" barb fittings
1	Jagg 4701 offset oil filter adapter assembly
3 ft	Jagg 30R7spec black oil hose
4	7/8" black worm-drive hose clamps
1	Jagg anti-rotation device
2	Bolts: 10-24 x 1-3/8" cap head, black
1	Stock-to-Jagg oil filter nipple



## TOOLS NEEDED

Strap wrench or oil filter removal tool	5/32" Allen wrench
Phillips head screwdriver	7/16" Allen wrench (if removing a stock H-D oil cooler)
7/8" socket	Hose cutter or sharp knife
1" deep-well socket	

## BASIC SYSTEM INSTALLATION GUIDELINES

- Route oil hose to avoid any hot surfaces or moving parts. Ensure all bends are smooth, with no sharp turns that may restrict oil supply to the engine.
- Oil cooler is designed to mount as detailed in these instructions. Any modifications may lead to decreased performance or item failure.
- When cutting oil hoses, always use a sharp knife, single-edge razor blade, or hose cutter. Make a straight, clean cut at 90° to the oil hose. This will ensure a proper fit where the oil hose attaches to its connection.
- Over tightening hose clamps may cause oil leaks.

**CAUTION: ALLOW MOTORCYCLE TO COOL BEFORE ATTEMPTING INSTALLATION OR RISK SERIOUS INJURY.**

### Part 1: Install Jagg offset oil filter adapter

The Jagg #4701 offset oil filter adapter is used to access the oil supply for the installation of a Jagg oil cooler. The #4701 directs oil through the filter first for optimal flow characteristics. After filtration, the oil may either travel to the oil cooler or by-pass the oil cooler, according to the built-in Viscosity Regulated Flow (VRF) plug function. Cold, viscous oil will by-pass the oil cooler, speeding warmup to standard operating temperature.

As the engine reaches operating temperature and oil reaches optimal viscosity range, the VRF plug will keep the #4701's by-pass hole closed, sending hot, filtered oil to the oil cooler, and delivering cool, clean oil to the engine.

Oil flow direction from adapter: oil feeds the oil cooler from the fitting on the left side and returns to the fitting on the right side, as viewed from

front with oil filter adapter fittings at bottom.


1. Remove spin-on oil filter, and clean the filter mounting surface thoroughly.
2. If removing and upgrading a factory Harley-Davidson oil cooling system, uninstall the stock oil filter adapter by removing the flanged oil filter nipple that holds the adapter in place using a 7/16" Allen wrench. Locate the stock-to-Jagg oil filter nipple (shown at right) included in the kit.



*Stock-to-Jagg  
oil filter nipple*

- Install by inserting the orange-painted end into the port where the stock oil filter stem was removed. Using a 7/8" socket, tighten until the hex is flush against the oil filter housing.
3. Disassemble the Jagg offset oil filter adapter by removing the five Allen head bolts from the front face of the adapter using a 5/32" Allen wrench. Then remove the front half of the adapter (the portion with hose fittings attached).
  4. With the longer/offset end of the adapter at the top, place the back half of the adapter (the portion with the flat rubber o-ring) over the threaded oil filter stem and tighten the included 1" lock-nut to finger-tight. The adapter's flat sealing rubber o-ring should face in, toward the stock oil filter housing, and be free of debris. (Do not apply oil to this o-ring.)

5. Locate part 4600AR-C Jagg anti-rotation device. Installation of this device will ensure the Jagg 4701 offset oil filter adapter will not rotate during oil filter removal.

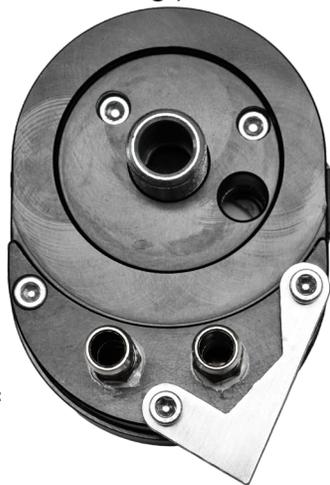


*Anti-rotation device fitment*

6. Place the anti-rotation device against the face of the front half of the adapter in the orientation shown below. The device affixes

to the two lower holes on the right side and center of the adapter in the orientation shown at right.

7. Insert the two black 10-24 Allen head bolts included with the anti-rotation device through the appropriate holes on the oil filter adapter as shown below.
8. Place the front half of the adapter over the already-installed back half and rotate the entire adapter to the left until the anti-rotation device makes contact with the engine case.
9. Remove the front half of the adapter and hold the back half of the adapter in its current orientation. Using a 1" deep-well socket securely tighten the 1" lock-nut so the back half of the adapter will not rotate and the sealing o-ring is tight against the stock filter mount. This may require a prying force applied against the adapter to allow tightening while retaining the chosen orientation.

**NOTE:** On rubber-mounted engine models, allow adequate clearance to ensure that the adapter will not strike any object when the motor shakes.



*AFM gasket*

10. Install AFM gasket onto the back half of the adapter.

**CAUTION:** AFM gasket should be applied dry. No additional gasket sealing compound is required. Ensure that the adapter halves are free of oil residue.

11. Place the front half of the adapter against the gasket and install Allen bolts loosely. If a thread lock compound is optioned, please choose a medium strength and use it on the Allen bolts at this step.
12. Evenly draw the two halves of the adapter together by gradually tightening the Allen bolts in an alternating criss-cross pattern (e.g., like tightening wheel lug nuts on a car).

13. When the adapter halves have been evenly drawn together, firmly tighten the Allen bolts in the same alternating criss-cross pattern as the previous step.

**SERVICE NOTE:** Inspect adapter and screws for tightness at each oil filter change.

### Part 2: Oil cooler mounting

14. Locate the voltage regulator and remove the nuts and washers from the voltage regulator mounting bolts. Retain these for future use.

15. Locate the Jagg LowMount 10-row oil cooler assembly. With the oil cooler oriented above the mounting bracket, install the assembly over the voltage regulator mounting bolts, taking care not to pinch any electrical wires.

**TIP:** Some motorcycle models may require the unfastening of the regulator wiring from its retaining clip, then rotating the retaining clip and wiring, in order to properly route oil lines.

16. Reinstall the voltage regulator over the oil cooler mounting bracket and fasten using nuts and washers removed and retained in earlier step.

**CAUTION:** If the regulator wiring has been detached during installation, ensure reattachment of regulator wiring.

### Part 3: Oil cooler plumbing

17. Cut the provided oil hose into two lengths.

18. Install a 90° hose fitting included in the kit onto each oil hose. Secure the hoses over the fittings with the 7/8" black hose clamps included in the kit.

**TIP:** Install the 7/8" black hose clamps loosely onto the hoses before installing the hoses onto the 90° fittings.

19. Install the 90° hose fittings onto the oil cooler's threaded male AN connections. Use a back-up wrench on the oil cooler fitting hex when tightening the AN fitting connection. The flow orientation of the oil cooler is non-direc-

tional, so either hose fitting will allow proper flow as an inlet or an outlet.

20. Measure, cut, route, and attach the oil hoses to the oil filter adapter. Secure the hoses over the fittings using the 7/8" black hose clamps onto the oil filter adapter inlet and outlet so the hose cannot pull over the barb on the fitting. A touch of oil on the oil filter adapter inlet and outlet allows the hoses to push on easily.

**NOTE:** It may be necessary to rotate hose clamps to ensure hose clamps do not interfere with oil filter installation.

**CAUTION:** Take care to make gentle bends in oil hose routing from the oil cooler to the adapter. Sharp bends may collapse under heat load and cause restriction to oil flow.

21. Install oil filter onto the threaded stem of the oil filter adapter. Tighten per factory/service manual recommendations.

### Part 3: Final inspection

22. Inspect the oil hoses to ensure there are no tight bends that may restrict oil flow and that they are not contacting any moving parts. If necessary secure the new hoses to the frame with plastic zip-ties.

23. Refill the engine with the correct amount and type of oil. Check the oil level per factory/service manual recommendations.

24. Start the engine and let it idle. Check all oil hose connections for any leakage. Tighten any hose clamps that may be leaking.

**NOTE:** Over-tightened hose clamps may cut into oil lines and cause oil leaks.

25. After installation completion and engine warm-up, shut the engine down and recheck the oil level. Correct the oil level if necessary, but do not over-fill.

SERVICE & UPGRADE ITEMS AVAILABLE	
PART NO.	DESCRIPTION
GK4600	Gasket service kit for Jagg offset oil filter adapter. Includes: AFM gasket and large o-ring for Jagg 4700 & 4701 offset oil filter adapter
21-SSN06-B	Stainless-steel braided oil hose. High performance 3/8"(-06) Nitrile rubber oil hose with stainless-steel braided jacket
22-AN06RU06-90	90° compression-fit hose end for direct fitment onto stainless-steel braided hose
22-AN06RU06-00	00°/straight compression-fit hose end for direct fitment onto stainless-steel braided hose
22-NPT18AN06-00	00°/straight adapter fitting, NPT1/8 male to AN06 male. Use to easily adapt the inlet & outlet of the Jagg offset oil filter adapter for use with stainless-steel braided oil hose with reusable compression-fit hose ends installed.
08-0069	Oil filter strap wrench. Simply one of the easiest oil filter wrenches to use. Engineered to access oil filter for removal around almost any obstacle. Use with 3/8-inch drive ratchet extension. Takes virtually no space in the toolbox or the saddlebag.

See these items and more at:  
[www.jagg.com](http://www.jagg.com)