



HEADLIGHT TRIM RING—BLACK

7276

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION

This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Headlight Trim Ring—Black
- 1 Hardware Kit Containing:
 - 1 M4 X 0.7 x 35mm Phillips Pan Head Screw
 - 1 M4 X 0.7 Custom Nut
- 1 Installation Instructions

TOOLS SUGGESTED

Phillips Head Screwdriver

NOTICE

If installing this product for another party, please make sure they receive this copy of the installation instructions so they are aware of the important information contained in them.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a service cover or soft, clean towel.

NOTE: Pictures shown are of chrome parts. Installation of Black parts will be the same.

STEP 2

Hook the inner lip of the new Trim Ring in the groove between the OEM trim ring and the fairing or nacelle. PIC 1

STEP 4

Spread the new Trim Ring apart a bit and push it into place as you move around the headlight. PIC 1

7276-21HD-0813

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.


ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



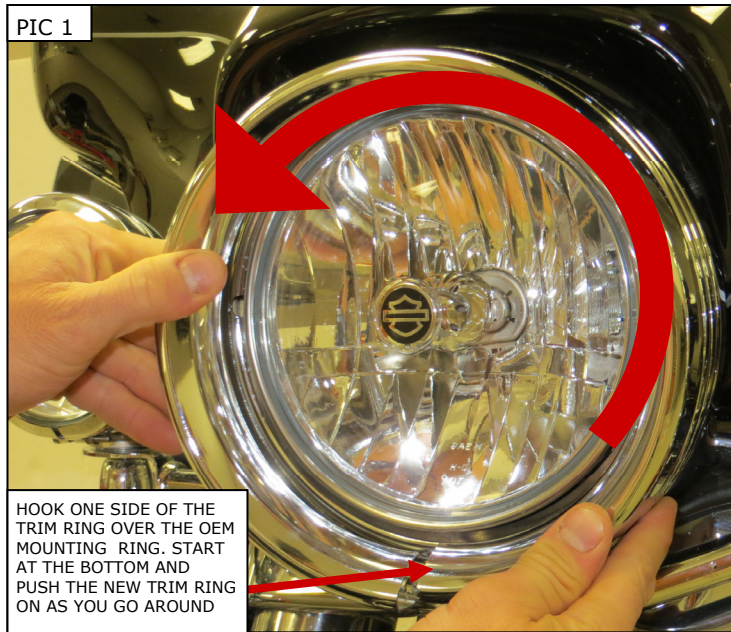

PIC 1
HOOK ONE SIDE OF THE TRIM RING OVER THE OEM MOUNTING RING. START AT THE BOTTOM AND PUSH THE NEW TRIM RING ON AS YOU GO AROUND

STEP 5 Install the included pan head screw through the holes in the bottom of the trim ring. PIC 2

STEP 6 Install the custom nut on the pan head screw. Align the seam at the bottom, then tighten the screw. PIC 2

NOTE: Do not over tighten the screw.

TIPS FOR PROPER CARE:

Clean often with mild soap and water and a soft cloth.

Rinse with fresh, clean water then dry with a soft cloth.

Only use polishes recommended for painted automotive-type surfaces.

Stay away from abrasive polishes.

Do not over-polish the part.

Ride On!



PIC 2
ALIGN THE SEAM

SECURE THE TRIM RING WITH THE PAN HEAD SCREW AND CUSTOM NUT. DO NOT OVER TIGHTEN THE NUT