



# INSTALLATION

## FLUSH MOUNT VENTED GAS CAP 8309

**FITS: H-D FUEL TANKS AND RIGHT SIDE FATBOBS ('83-UP)**

PART #	INCLUDED
	1 Outer Gas Cap Right Hand Thread
	2 Brass Installation Pins
	1 Beveled Gasket
	1 OEM Style Gasket
	8 6"-32 x 3/16" Flat Head Cap Screws
8311	1 Key
618309C	1 Inner Gas Cap — Vented
	1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Six inch Screwdriver, 3/32" Allen Wrench, 9/32" Wrench or Socket Wrench

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### PROCEDURE

**STEP 1** Remove the stock gas cap. Thoroughly clean the surface around the tank opening (bung).

**STEP 2** Determine the correct gasket for your application. Install **ONLY** the gasket that is called for in your application. Do not try to double up the gaskets.

-cont.-

**CUSTOMER SERVICE**  
877.370.3604 (toll free)

**INSTALLATION QUESTIONS**  
techsupport@kuryakyn.com  
or call 715.247.2983

**LIMITED WARRANTY**  
Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



**CAUTION! IMPORTANT YOU MUST USE THE CORRECT GASKET FOR YOUR YEAR MOTORCYCLE!**

Using the incorrect gasket will cause damage to your paint job! Models thru 1995 use the beveled gasket, 1996 and newer use the OEM style split gasket. See [PIC.1](#) and [PIC.1A](#).

**Küryakyn®**

**STEP 3** See [PIC.2](#). Remove two of the small flat head screws from around the outer flange of the gas cap, 180° apart. In their place install the two brass studs. Screw the cap in as far as you can by hand. Carefully lay a screwdriver blade across these studs as shown and finish tightening. The caps should be good and snug, but don't over do it or you may score the paint around the cap.

**STEP 4** Remove the brass installation studs and replace the small flat head screws. Tighten securely. Test drive the bike and inspect for leaks. If a leak is detected, double check that the correct gasket has been installed and reassemble.


**STEP 5** Place the key on your key ring as it will be needed to open your cap!

**CAUTION! BE SURE GAS CAPS ARE SUFFICIENTLY TIGHT BEFORE RIDING.**

**ATTENTION!** It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Küryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

*Ride On!*


**PIC.1**

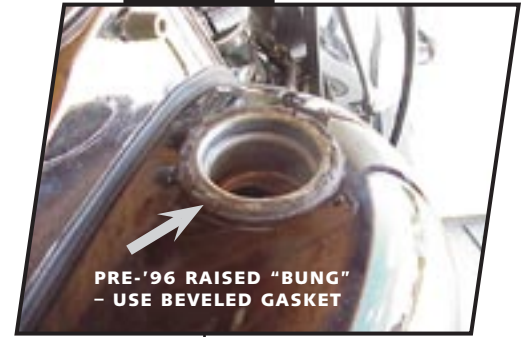

**PIC.1A**



**PIC.2**

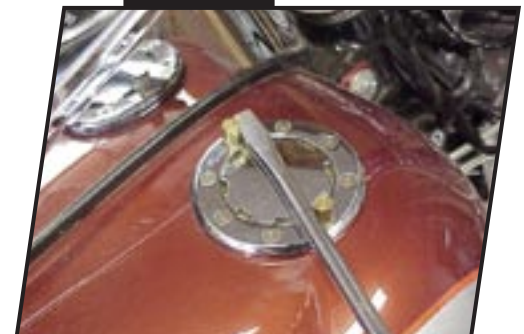

**PAGE**

**2**