



INSTALLATION



UNIVERSAL HELMET LOCK 4232

FITS: ANY 1-1/4" TO 1-1/2" ROUND TUBE

PARTS INCLUDED

- 1 Universal Helmet Lock assembly
- 2 Keys on ring
- 2 Tamper-proof screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

ATTENTION! Test fit the helmet lock location before fully tightening the tamper-proof screws. It is extremely difficult to remove the screws.

WARNING! AVOID LOSS OF CONTROL, DAMAGE AND SERIOUS INJURY OR DEATH. DO NOT OPERATE THE MOTORCYCLE WITH THE HELMET LOCKED INTO THE UNIVERSAL HELMET LOCK.

TOOLS SUGGESTED

Flat blade screwdriver.

PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Test fit the helmet lock on the motorcycle to ensure that the helmet will not damage or interfere with any other components on your motorcycle. Do not install the tamper-proof screws at this time.


NOTE It is very important to perform the "test-fit" due to the extreme difficulty in removing the tamper-proof screws after they are tightened.

ATTENTION! Ensure clearance of painted surfaces that could be damaged by a helmet or hot surfaces that could cause damage to your helmet.

STEP 3 Insert the tamper-proof screws through the front side of the helmet lock as shown in PIC.1.

STEP 4 Tighten screws evenly and ensure that the helmet lock is properly clamped onto the tube.

-cont.-

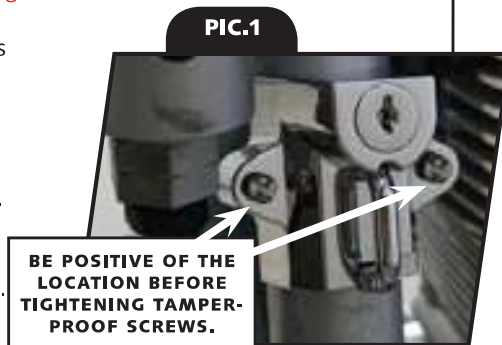

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

· Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).

· The product must be properly installed, maintained and operated under normal conditions.

· Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.

· Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.

· Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.

· Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.

· Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



LOCK OPERATION

- STEP 1** Insert key into lock; turn clockwise to open latch.
- STEP 2** Loop helmet strap over the lock latch; shut the latch.
- STEP 3** Turn the key counter-clockwise and remove the key to lock the latch.
- STEP 4** Repeat Step 1 to remove helmet.

Ride On!

Kürçakyn®

PAGE

2

UNIVERSAL HELMET LOCK **INSTALLATION**