

MACHETETM EXTENDED BAG LED LIGHTS

PARTS INCLUDED

- Right Machete light assembly
 Left Machete light assembly
- 1 Plug and Play Wiring Adapter
- 1 Installation kit

INSTALLATION INSTRUCTIONS:

- 1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.
- 2. Remove the seat and set it aside. Remove the saddlebags and lay them down onto a table. (FIG.1)
- 3. Locate the OEM 6-pin wiring harness and install the wiring adapter. Connect the left and right Machete lights to the wiring adapter to understand their placement and functions. Disconnect the Machete lights. (FIG.5)
- 4. Test fit the Machete lights onto the saddlebags and mark the position with masking tape. (FIG.2)
- 5. ATTENTION: Thoroughly clean the mounting surface with denatured alcohol to remove all wax, oil, and residue. NOTE, New motorcycles are delivered from the factory covered in protective oil. Remove it before installing this product. NOTE, Do not install if the temperature is below 50° F. The adhesive will not cure properly.
- 6. Remove the red backer from the adhesive and install the Machete light. Press the light firmly onto the surface for 60 seconds. The adhesive cures within 24 hrs.
- 7. Use the adhesive backed zip tie retainers to route the wire so that it does not come into contact with the saddlebag support bar or the shock absorbers. (FIG.3) (FIG.4)
- 8. Reinstall the saddlebags and route the wires to the under-seat area.

9. Apply a drop of dielectric grease to the connectors. Connect the left and right Machete lights to the plug and play wiring adapter.

10. Place the 4-pin connectors outside the top frame rail if you plan to remove the saddlebags often. Reinstall seat.







WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro[®] warrants that products sold hereunder to the original purchaser, if maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of (3) years from date of purchase, and a lifetime warranty against LED failure.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.


Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products.

Please visit our website Ciro3d.com for our complete warranty policy.



G0040150 REV. -

PAGE 2

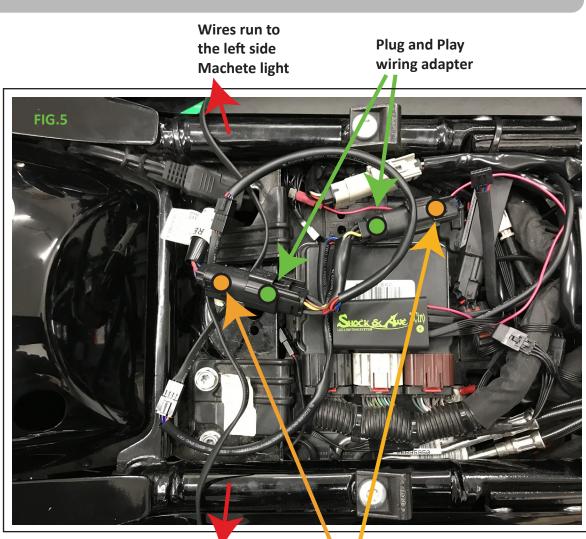

Wires run to the right side Machete light OEM 6 pin wiring harness



